

2JE21

5GNR Surface Mount

Key Features

5GNR

- 617-960 MHz
- 1427-2690 MHz
- 3300-5000 MHz
- 5150-5925 MHz

Surface Mount

High Performance

Fiberglass Material

Ground Plane Dependent

Dimensions 40 x 7 x 3 mm



1. Antenna and electrical specifications

| Parameters | 5GNR Antenna | | | |
|-----------------------------|---|---|---------------------------------|----------------------|
| Technologies | 5G, 4G, 3G and 2G | | | |
| Standards | 5GNR/4GLTE/FirstNet/CBRS/LPWA/CAT-X/CAT-Mx/CAT-NBx/NB-IoT/3G/2G | | | |
| Frequency (MHz) | 617-960 | 1427-2690 | 3300-5000 | 5150-5925 |
| Band (MHz) | 600, 700, 850, 900 | 1500, 1600, 1700, 1800, 1900, 2000, 2100, 2300, 2500, 2600 | 3300, 3500, 3600, 3700, 4500 | 5200, 5500, 5800 |
| 5GNR Bands | n5, n8, 12, n20, n28, n71, n81, n82, n83, | n1, n2, n3, n7, n25, n34, n38, n39, n40, n41, n50, n51, n66, n70, n74, n75, n76, n80, n84, n86 | n77, n78, n79 | |
| 4GLTE Bands | B5, B6, B8, B12, B13, B14, B17, B18, B19, B20, B26, B27, B28, B29, B44, B67, B68, B71, B85 | B1, B2, B3, B4, B7, B9, B10, B11, B21, B23, B24, B25, B30, B32, B33, B34, B35, B36, B37, B38, B39, B40, B41, B45, B50, B51, B65, B66, B69, B70, B74, B75, B76 | B22, B42, B43, B48, B49, B52 | B46, B47, B252, B255 |
| 3GCELL Bands | B5, B6, B8, B12, B13, B14, B19, B20, B26 | B1, B2, B3, B4, B7, B9, B10, B11, B21, B25, B32, B33, B34, B35, B36, B37, B38, B39, B40 | B22 | |
| 2GCELL Bands | 710, 750, 810T, 850, 900P, 900E, 900R | 1800DCS, 1900PCS | | |
| CDMACELL Bands | BC0, BC2, BC3, BC7, BC9, BC10, BC12, BC18, BC19 | BC1, BC4, BC6, BC8, BC13, BC14, BC15, BC16, BC20, BC21 | | |
| Return Loss (dB) | ~-6.6 | ~-9.0 | ~-6.6 | ~-7.9 |
| VSWR | ~3.0:1 | ~2.3:1 | ~2.8:1 | ~2.4:1 |
| Efficiency (%) | ~53.0 | ~60.8 | ~45.3 | ~43.1 |
| Peak Gain (dBi) | ~1.4 | ~3.3 | ~2.9 | ~1.8 |
| Average Gain (dB) | ~-2.8 | ~-2.2 | ~-3.5 | ~-3.7 |
| Impedance (Ohm) | 50 | | | |
| Polarisation | Linear | | | |
| Radiation Pattern | Omni-Directional | | | |
| Max. Input Power (W) | 25 | | | |

Antenna Measurement Conditions:



Mounted on ground plane of 120 x 40.4 mm



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

| Specifications | 2JE21 |
|--------------------------------------|---|
| Mounting Type | Surface Mount |
| Dimensions (mm) | 40 x 7 x 3 |
| Material | Fiberglass |
| Operating Temperature (C) | -40 to +85 |
| Storage Temperature (C) | -40 to +85 |
| Storage Relative Humidity (%) | Up to 93 at 30 C |
| Substance Compliance | RoHS |
| Shear Force Test | Minimum specified shear force: 25 kgf according to Relevant Standards for Tests: IEC62137-1-2 (2007) |


3. Antenna parameters

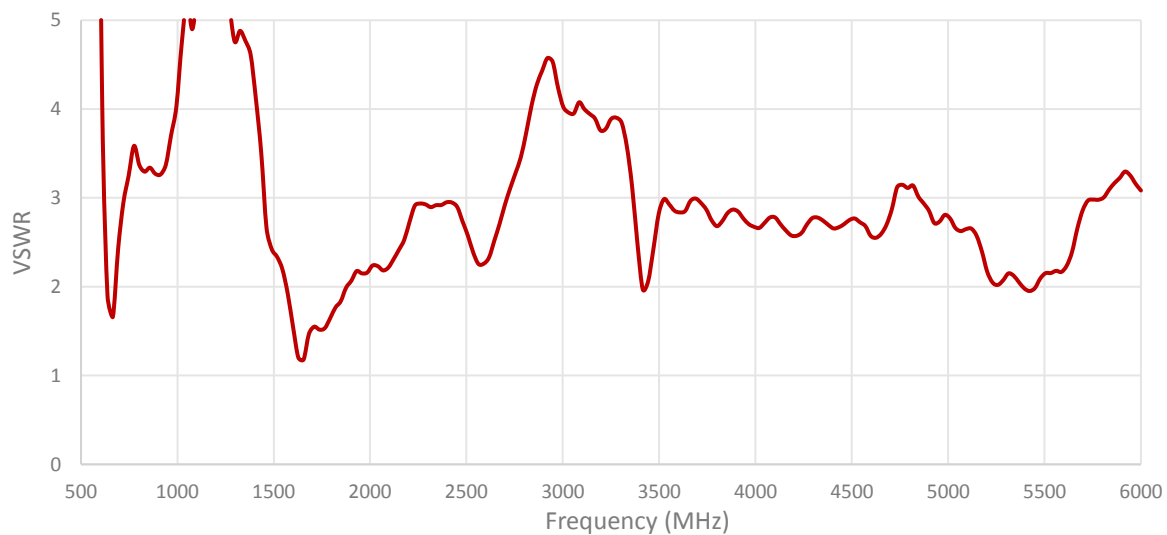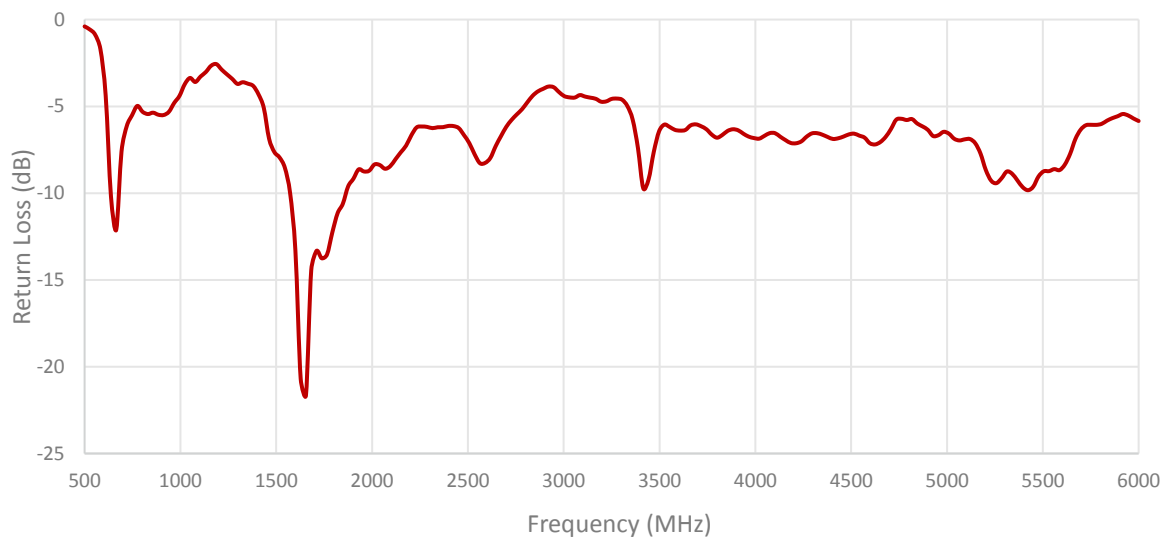

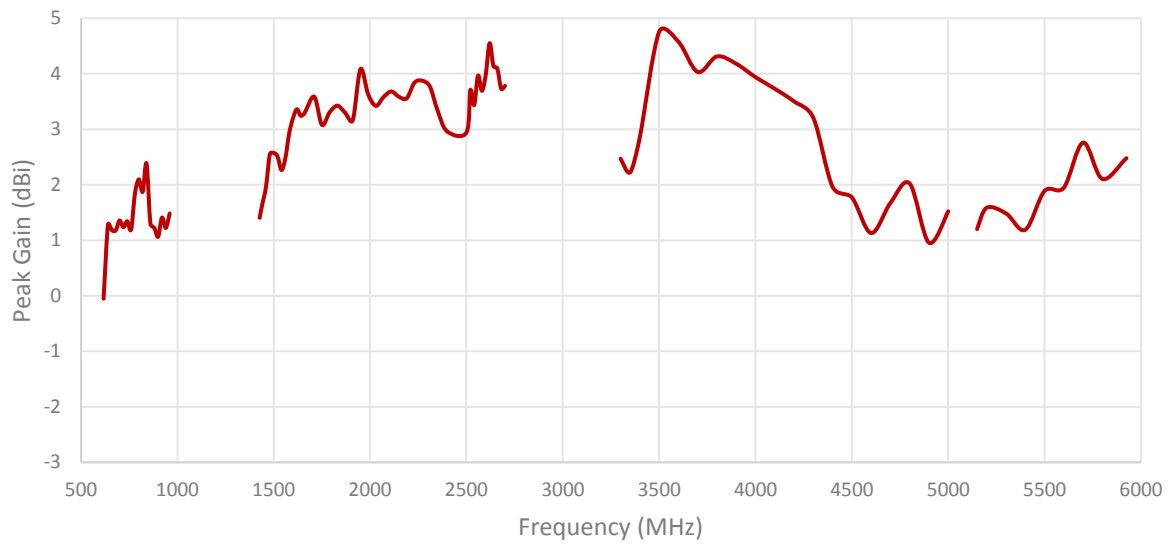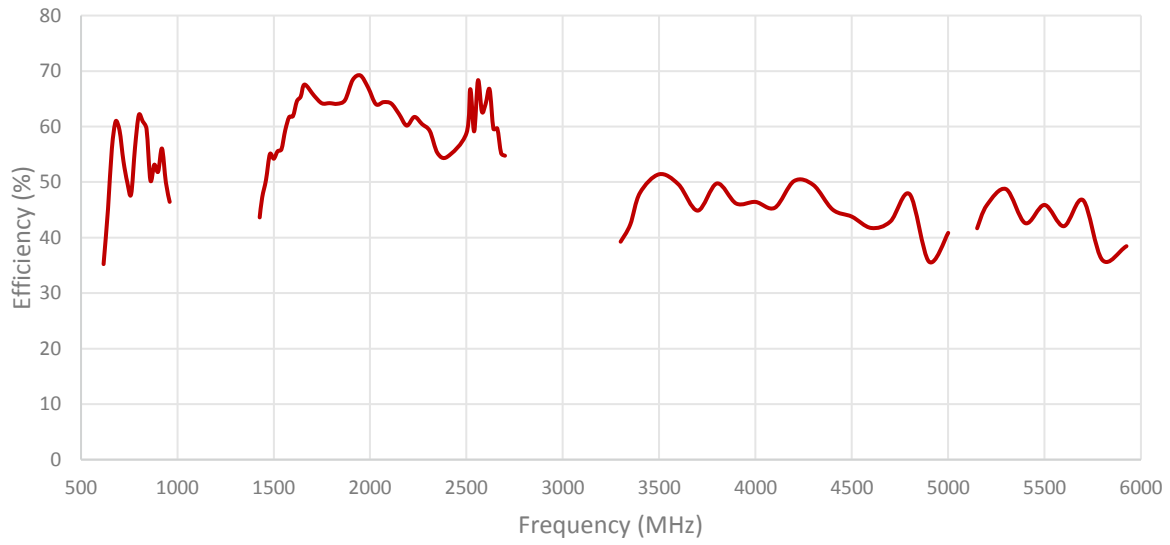


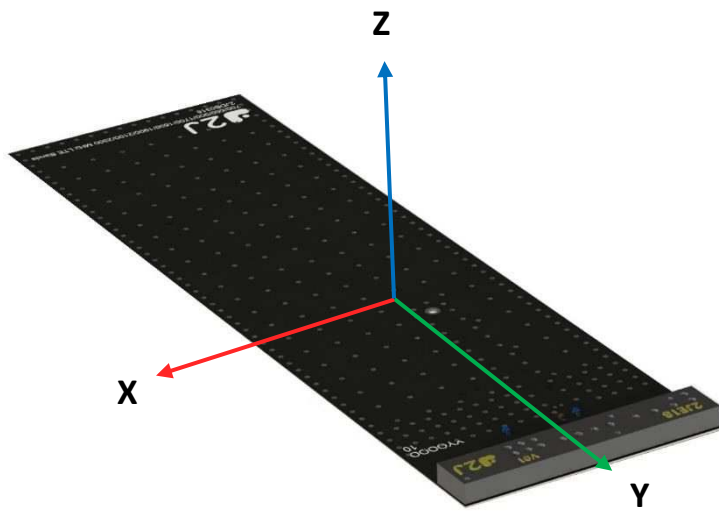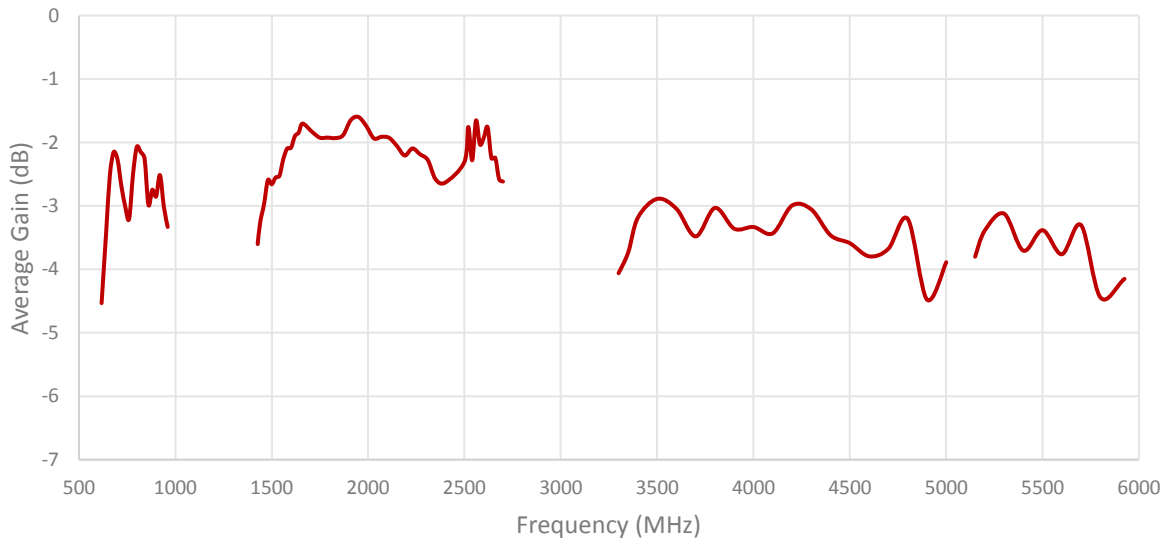


Radiation pattern reference

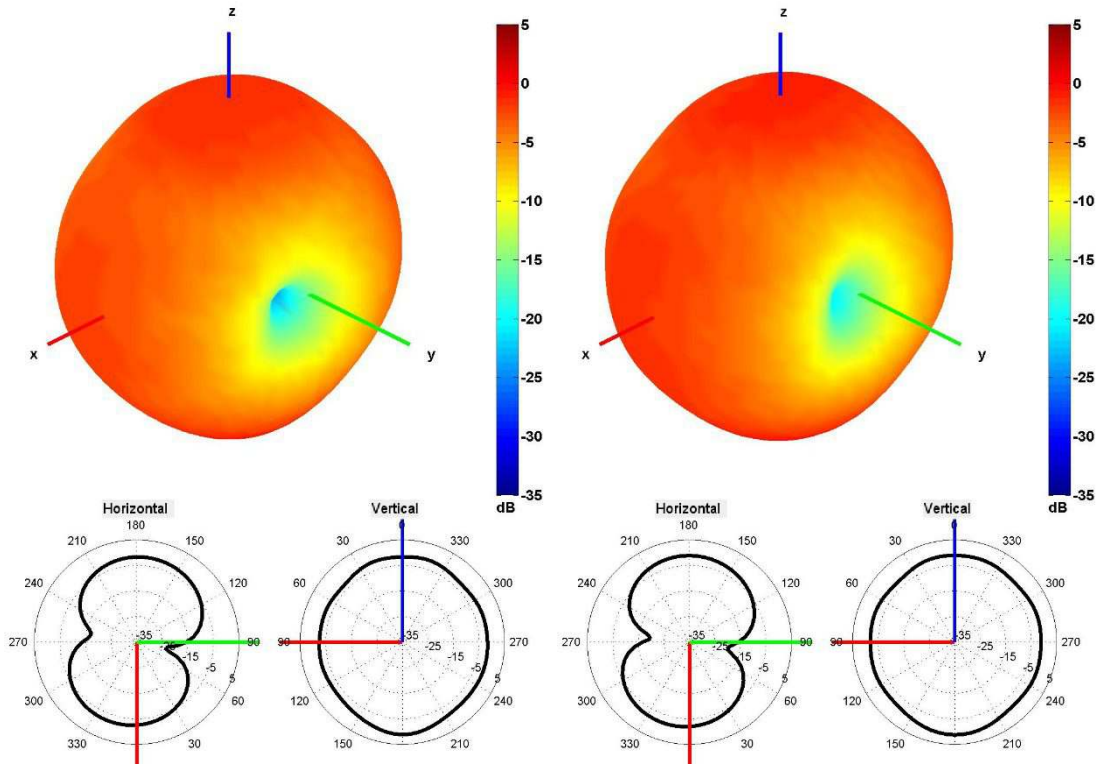


650 and 750 MHz Radiation pattern

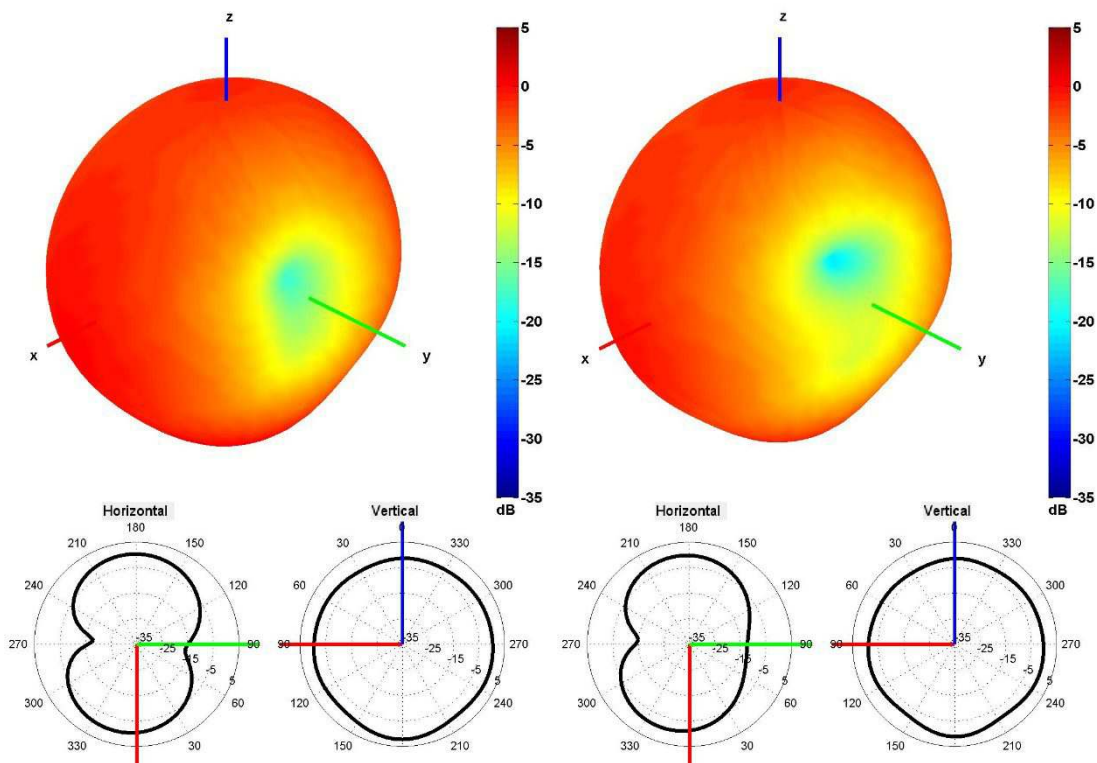


850 and 940 MHz Radiation pattern

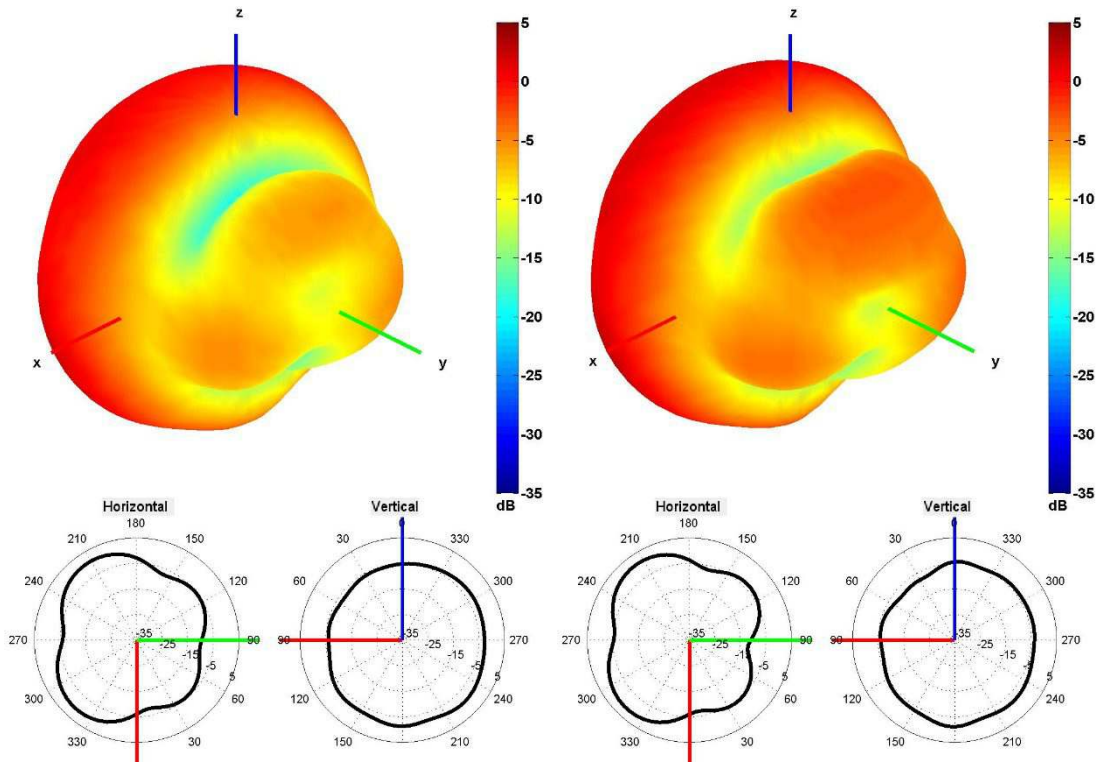


1500 and 1600 MHz Radiation pattern

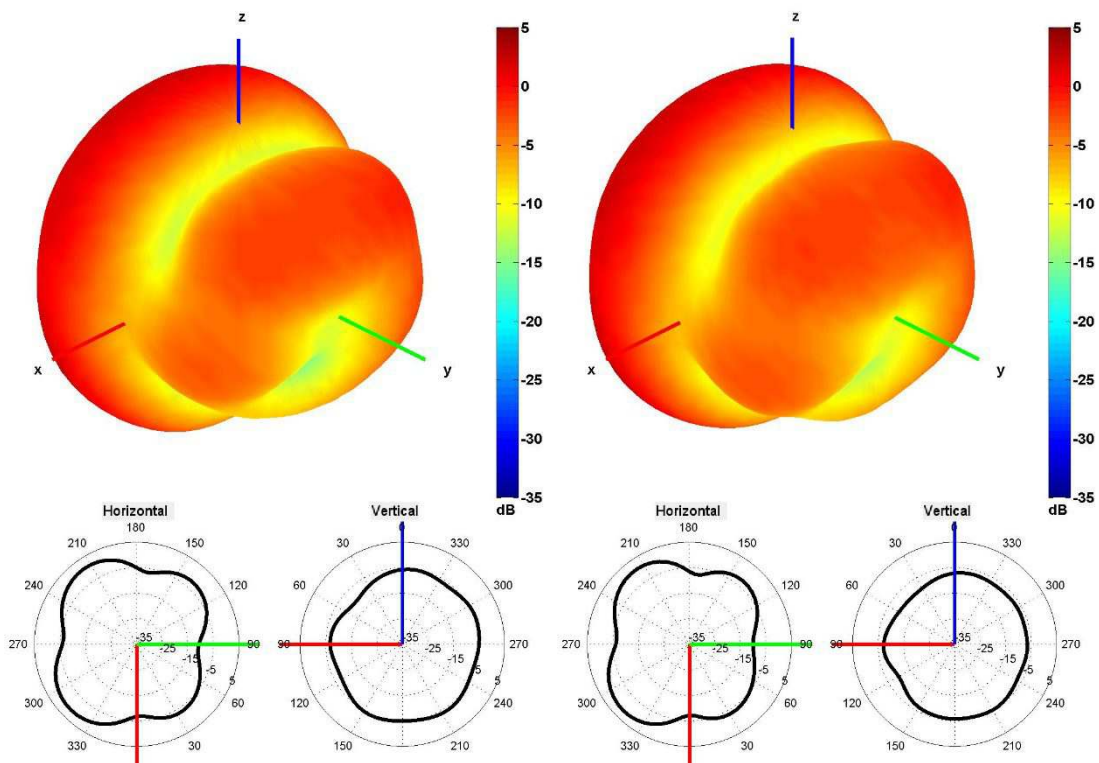


1750 and 1850 MHz Radiation pattern

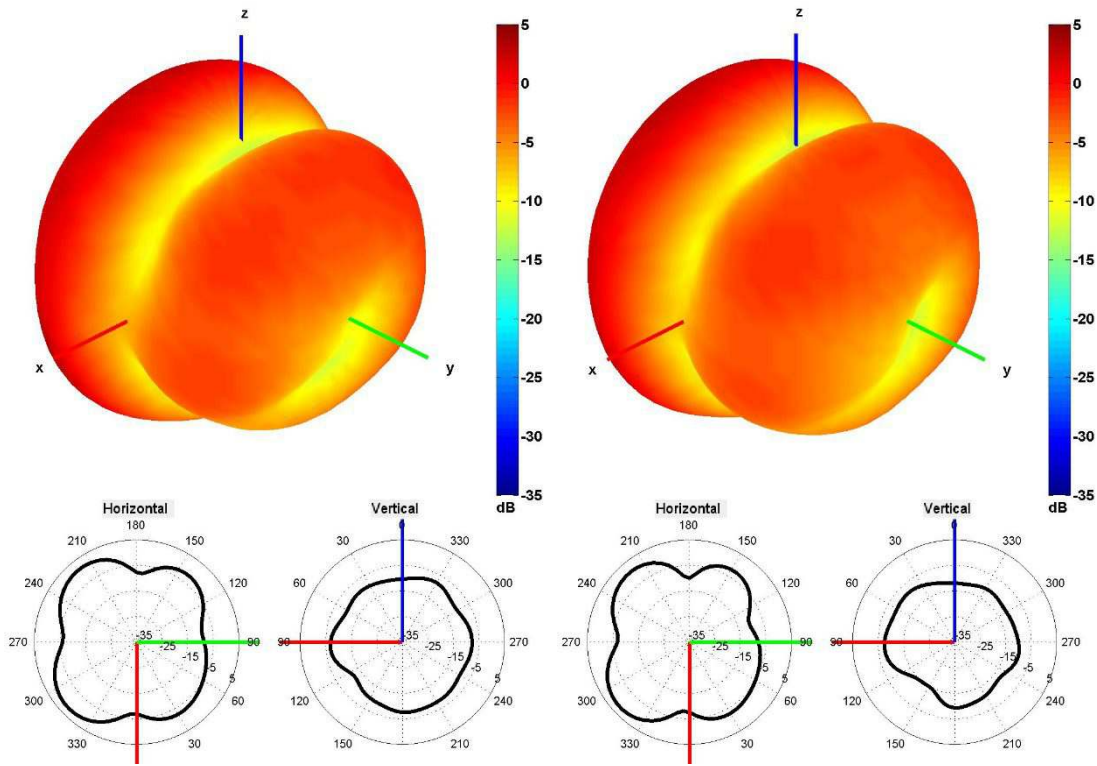


1950 and 2100 MHz Radiation pattern

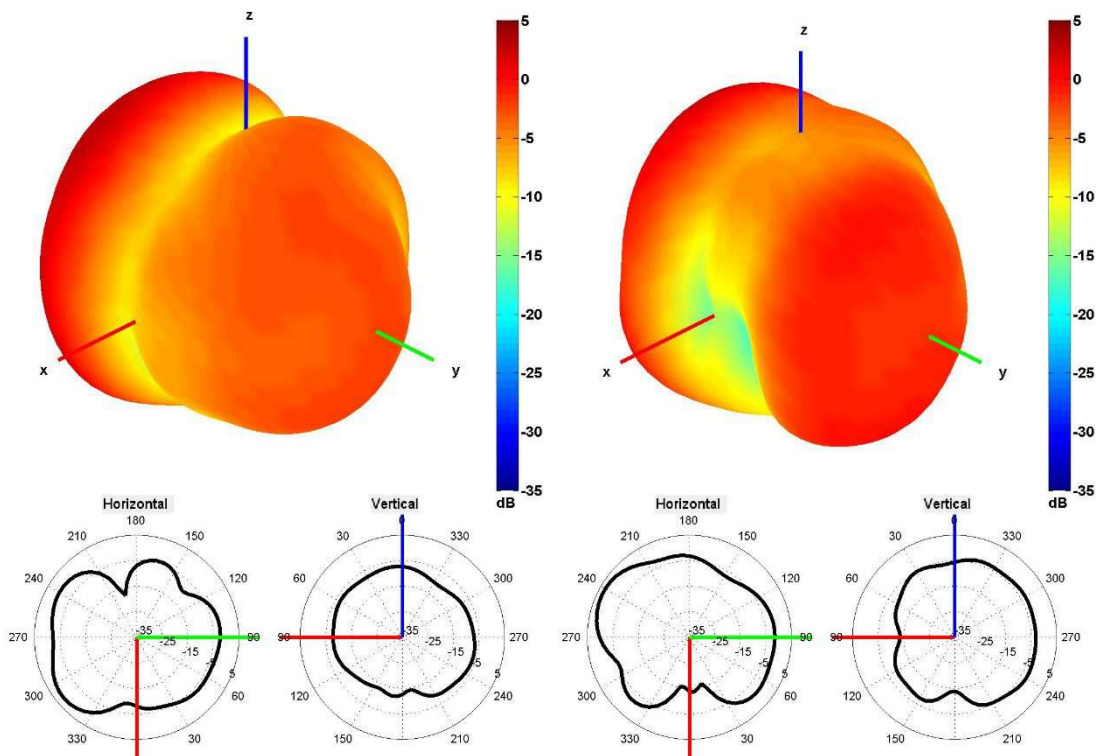

2350 and 2600 MHz Radiation pattern

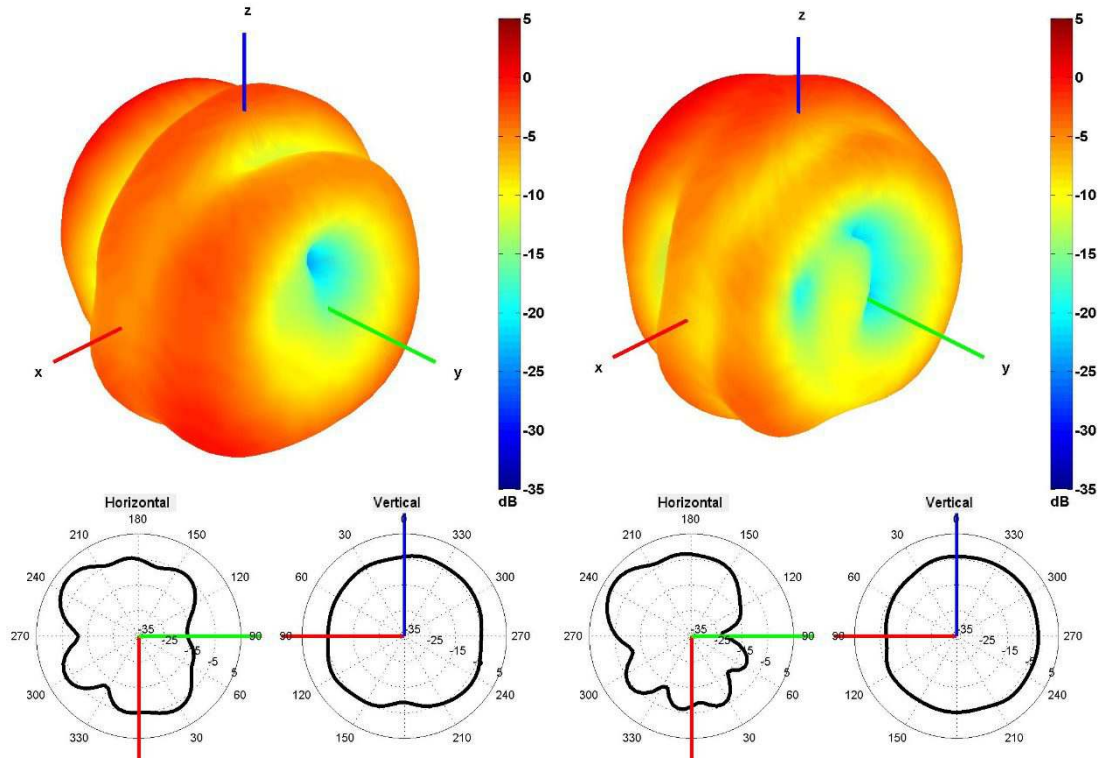


3350 and 3600 MHz Radiation pattern

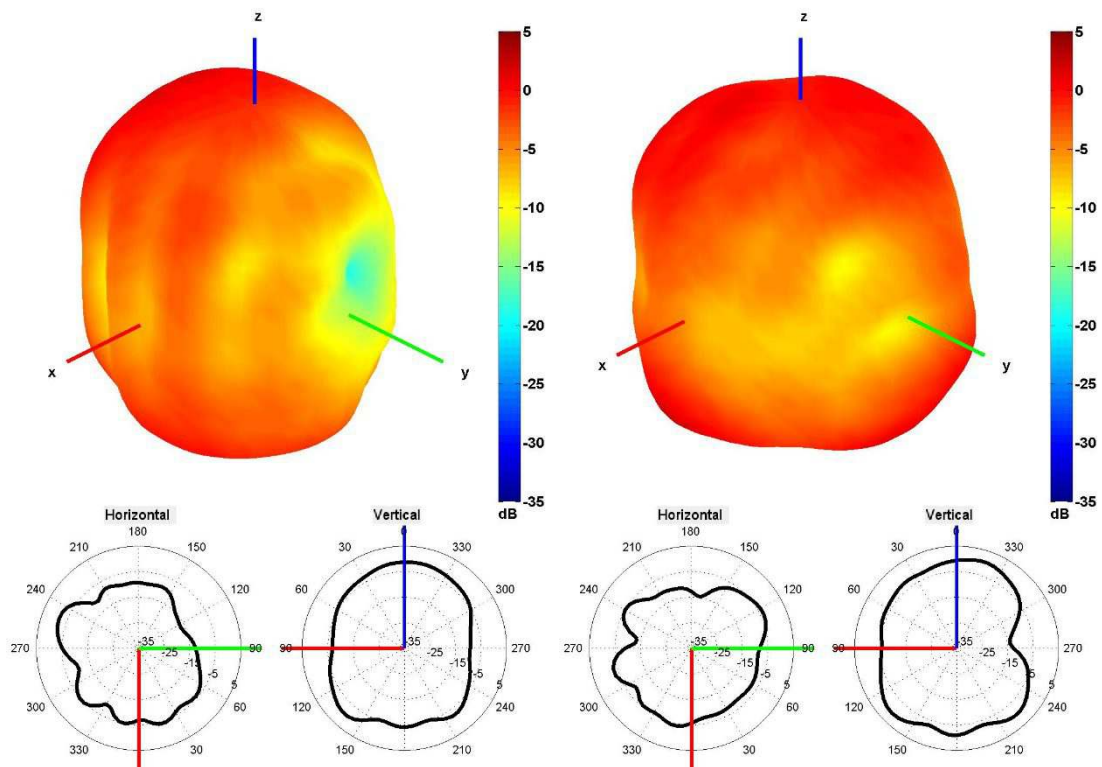



4500 and 5500 MHz Radiation pattern

4. PCB Layout

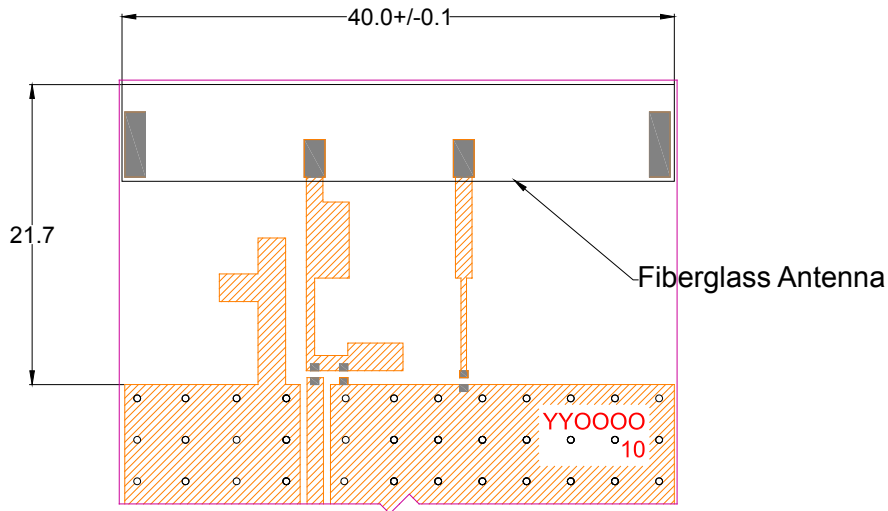

Minimum area required for antenna integration (40mm × 21.7mm)


-  Solder Region
-  Copper Region
-  Copper-Free Region

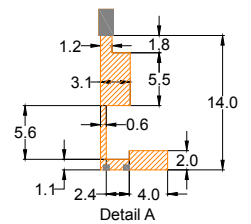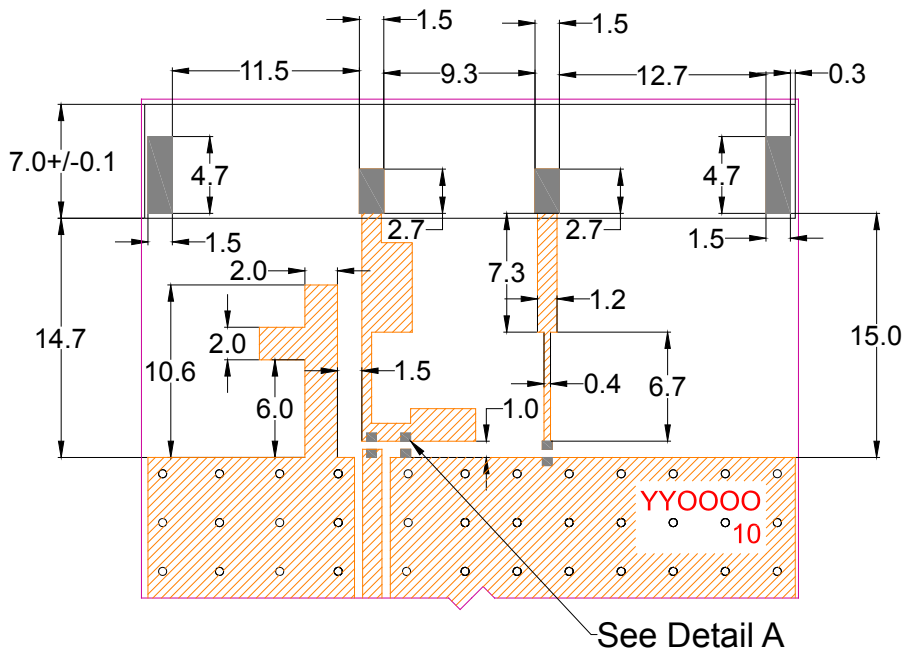


Tolerance of Linear Dimensions (unless otherwise indicated):

| Dimension (mm) | Tolerance |
|----------------|-----------|
| 0.5-6 | +/- 0.05 |
| 6-30 | +/- 0.07 |
| 30-50 | +/- 0.1 |

Layout dimensions for antenna integration (mm)



-  Solder Region
-  Copper Region
-  Copper-Free Region

5. Matching Network

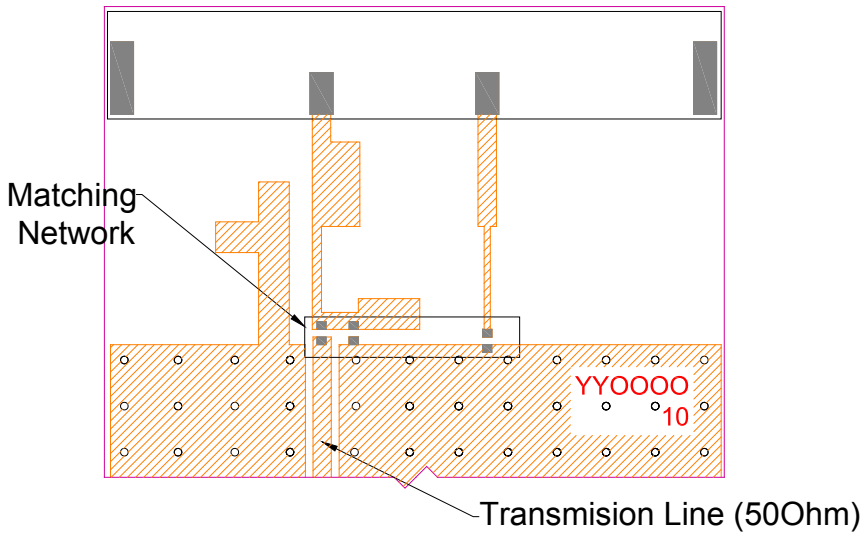

- Solder Region
- Copper Region
- Copper-Free Region


Matching network drawing

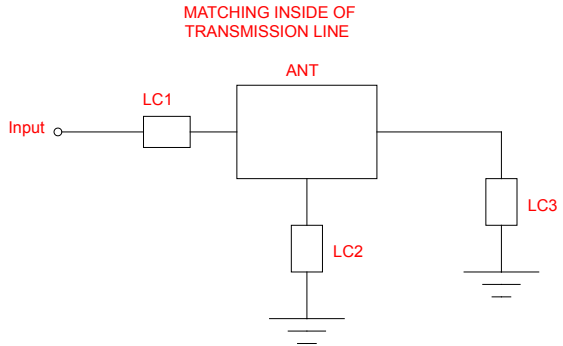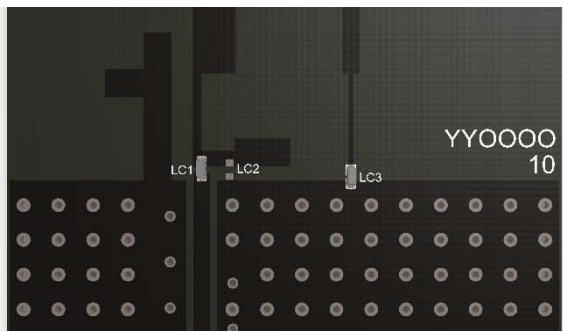

3D View of matching components and recommended values
(LC1=0Ohm, LC2=OPEN, LC3=8.2nH)


6. Evaluation Board

140mm x 40.4mm

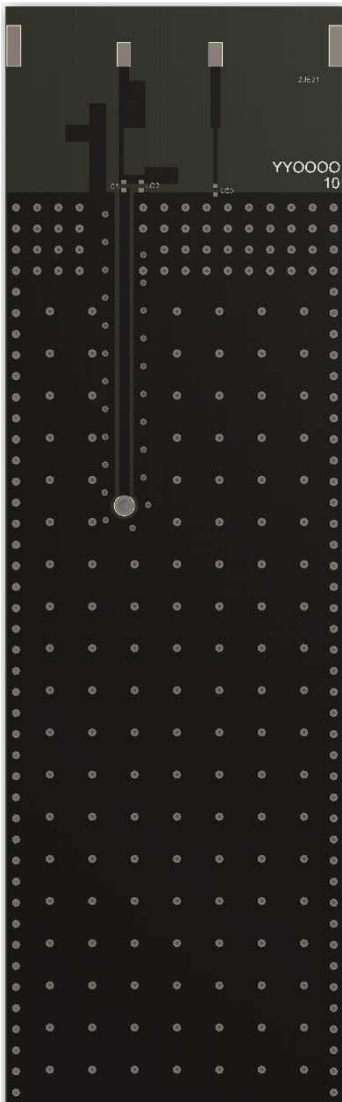


Front View without Antenna

140mm x 40.4mm

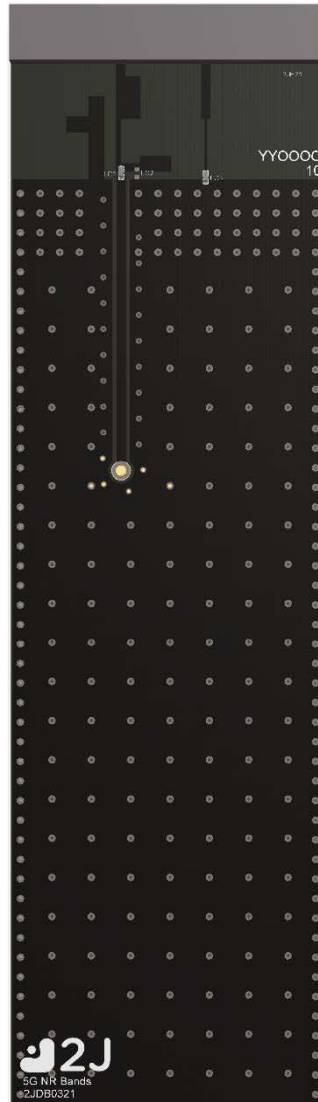

Front View with Antenna

140mm x 40.4mm

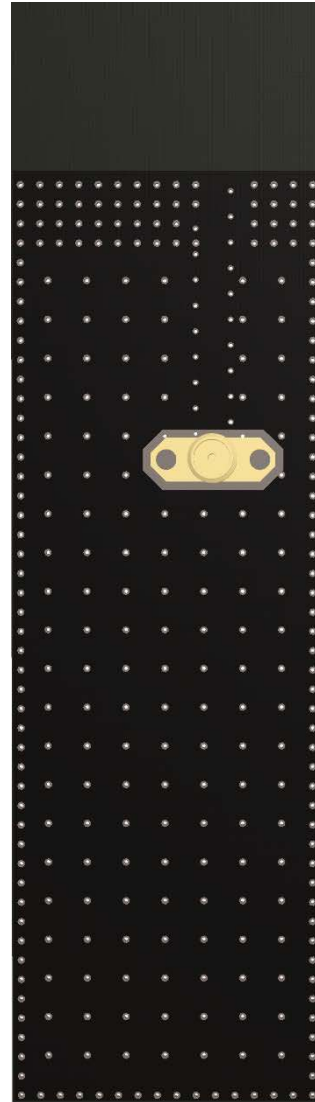

Back View

140mm x 40.4mm
(PCB: 0.8mm, Antenna: 3mm,
Connector: 9.5mm)




Side View

7. Packaging

PACKAGING SPECIFICATION

| | |
|--|------------------|
| Antenna | 2JE21 |
| REEL | |
| Max Quantity per Reel | 1500 |
| REEL CARTON | |
| Reels per Carton | 2 |
| Max Quantity per Carton | 3000 |
| Reel Carton Dimensions (cm) | 36.5 x 36.5 x 16 |
| Reel Carton Weight (Kg) | 7 |
| PALLET | |
| Max Cartons per Pallet | 42 |
| Cartons per Layer | 6 |
| Number of Layers | 7 |
| Max Quantities per Pallet | 126,000 |
| Total Cartons Dimensions (cm) | 109.5 x 73 x 112 |
| Total Cartons Weight (Kg) | 294 |
| Pallet size and weight not included above | |
| Typical Pallet Size (cm) | 120 x 100 x 14.4 |
| Typical Pallet Weight (Kg) | 5-25 |

8. Tape and Reel Information

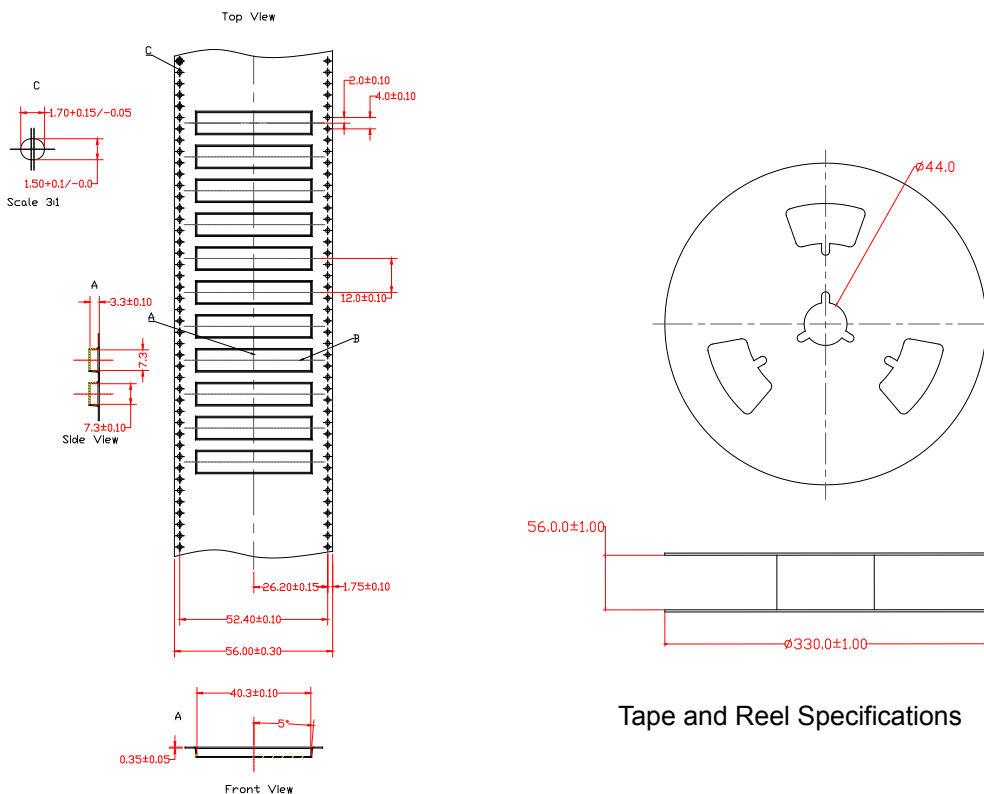


Tape and Reel Specifications

REFLOW TEMPERATURE PROFILE

Minimum Recommended Reflow Profile


| | Method of heat transfer | Controlled hot air convection |
|---|--|-------------------------------|
| 1 | Average temperature gradient in preheating | 2.5 °C/s |
| 2 | Soak time | 2-3 minutes |
| 3 | Max temperature gradient in reflow | 3 °C/s |
| 4 | Time above 217 °C | Max 30 sec |
| 5 | Peak temperature in reflow | 230 °C for 10 seconds |
| 6 | Temperature gradient in cooling | Max -5 °C/s |

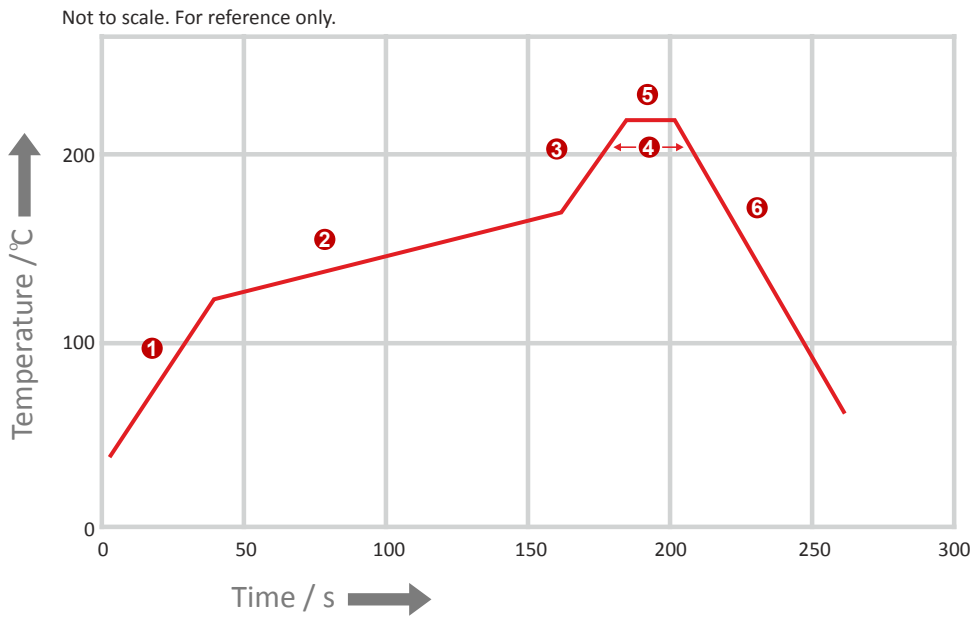


REFLOW TEMPERATURE PROFILE

Maximum Recommended Reflow Profile

| | Method of heat transfer | Controlled hot air convection |
|---|--|-------------------------------|
| 1 | Average temperature gradient in preheating | 2.5 °C/s |
| 2 | Soak time | 2-3 minutes |
| 3 | Max temperature gradient in reflow | 3 °C/s |
| 4 | Time above 217 °C | Max 60 sec |
| 5 | Time above 230 °C | Max 50 sec |
| 6 | Time above 250 °C | Max 10 sec |
| 7 | Peak temperature in reflow | 260 °C for 5 seconds |
| 8 | Temperature gradient in cooling | Max -5 °C/s |

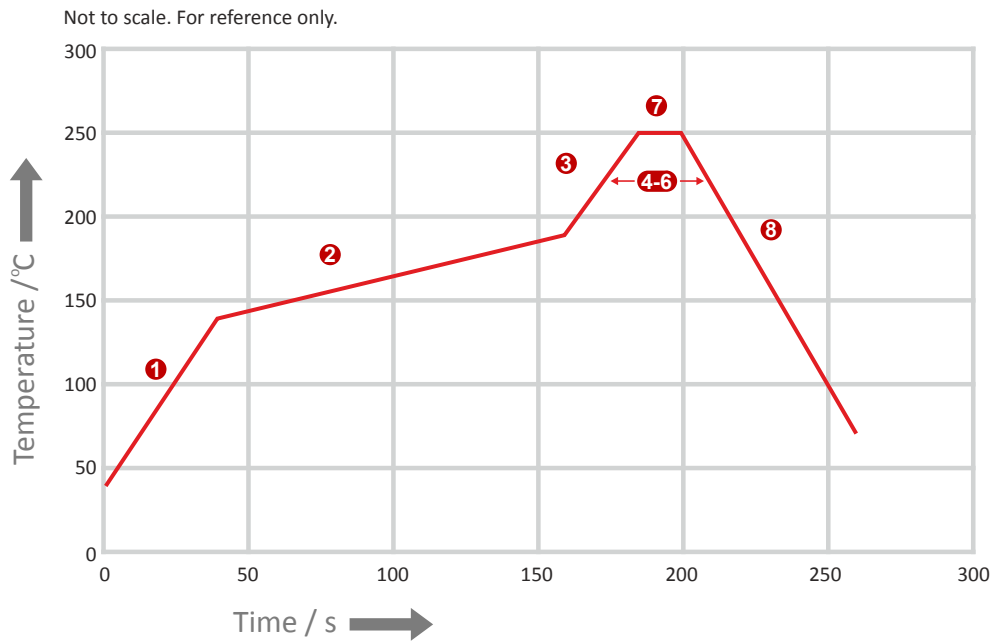

9. Antenna drawings

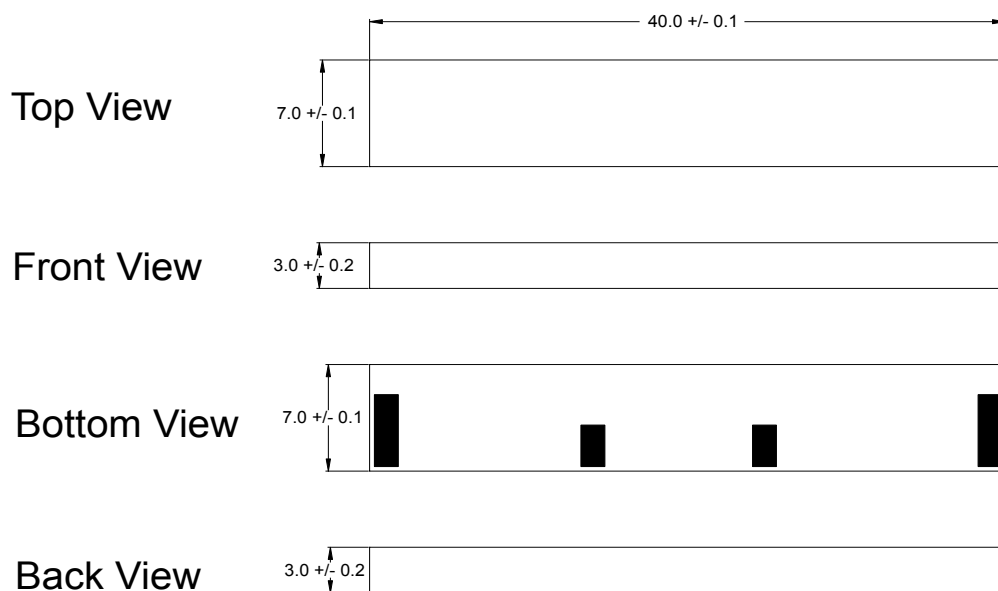

Dimensions for fiberglass antenna 40 x 7 x 3 mm ± 0.2 mm

10. Antenna Images

