

2JF0202P

2.4 / 5.0GHz ISM Flexible Polymer

Key Features

2.4 / 5.0 GHz ISM

- 2410-2490 MHz

- 4920-5925 MHz

Embedded Antenna


High Performance

Ground Plane Independent

Self-Adhesive

Dimensions 30 × 30 × 0.2 mm

Customizable Cable and Connector

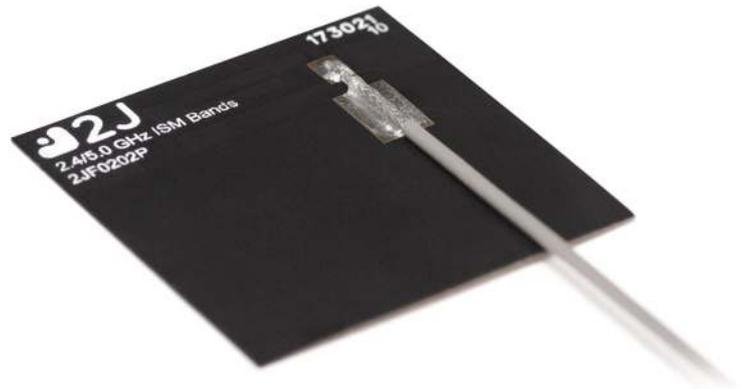

Description

2JF0202P antenna is flexible high efficiency embedded solution covering both 2.4 GHz and 5.0 GHz bands. Antenna can be easily mounted in most devices due to self-adhesive layer and small size. 2JF0202P is omnidirectional, ground plane independent antenna. Cable and connector is upon request.



1. Antenna and electrical specifications

Parameters	2.4 / 5.0 GHz ISM Antenna	
Standards	WiFi, BT, ZigBee, ISM	
Band (MHz)	2.4 GHz	5.0 GHz
Frequency (MHz)	2410-2490	4920-5925
Return Loss (dB)	~-20.2	~-14.8
VSWR	~1.2:1	~1.5:1
Efficiency (%)	~76.3	~74.7
Peak Gain (dBi)	~4.4	~6.7
Average Gain (dB)	~-1.2	~-1.3
Impedance (Ohm)	50	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power (W)	25	
Connector Type	Most RF Connectors (U.FL Standard)	
Cable Length	Any Cable Length (100mm Standard)	
Cable Type	Other Cables Available (1.37mm Standard)	

Antenna Measurement Conditions:

Mounted 30x30x0.25 cm ABS Plate



100 mm of 1.37 mm Cable



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2JF0202P
Mounting Type	Self-Adhesive
Dimensions (mm)	30 x 30 x 0.2
Adhesive Type	3M 467
Material	Flexible Polymer
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS


3. Antenna parameters

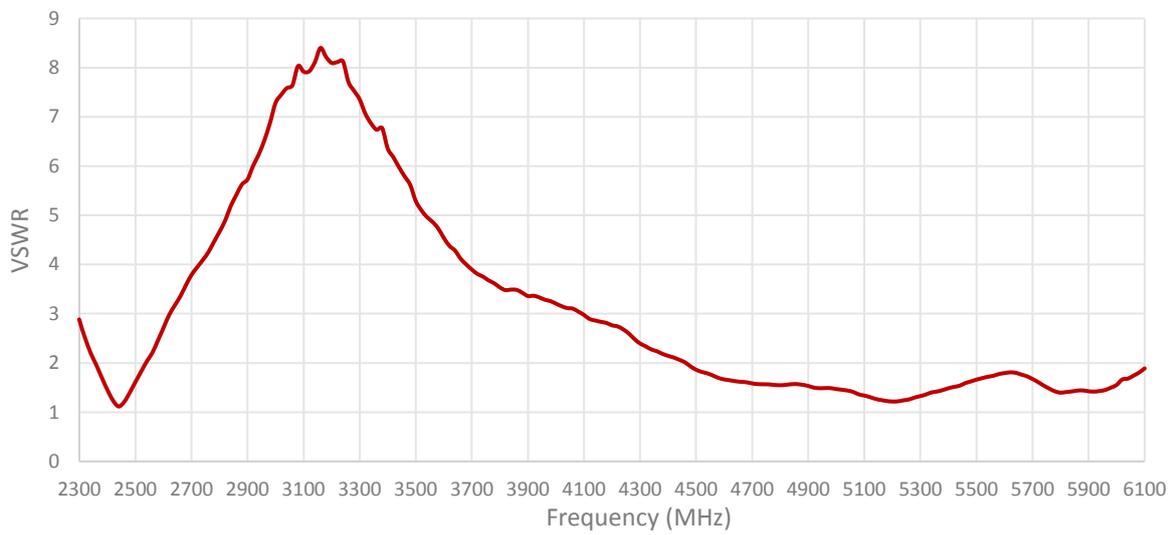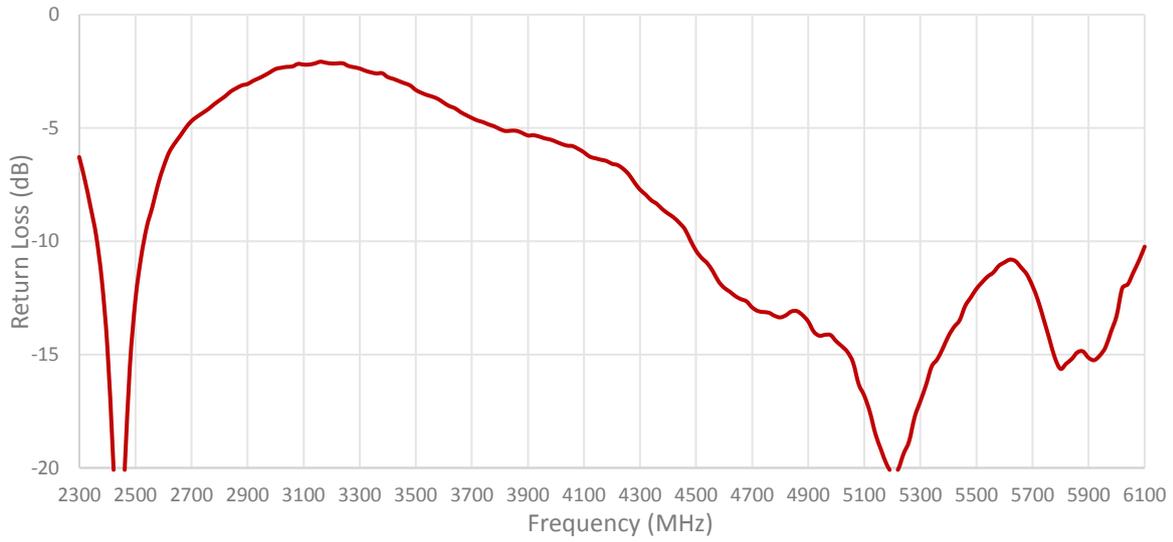

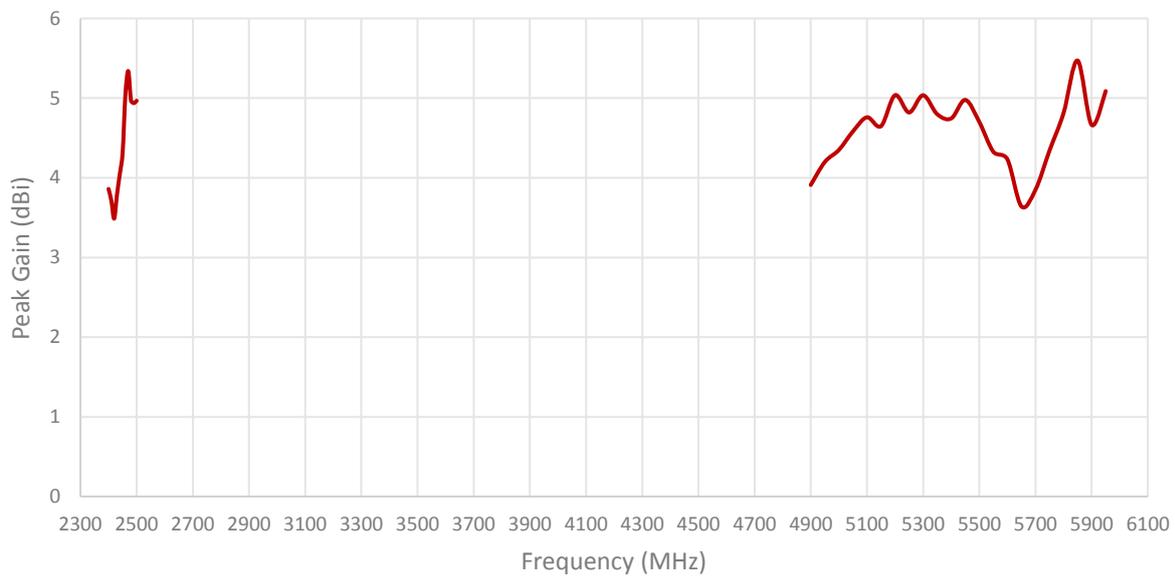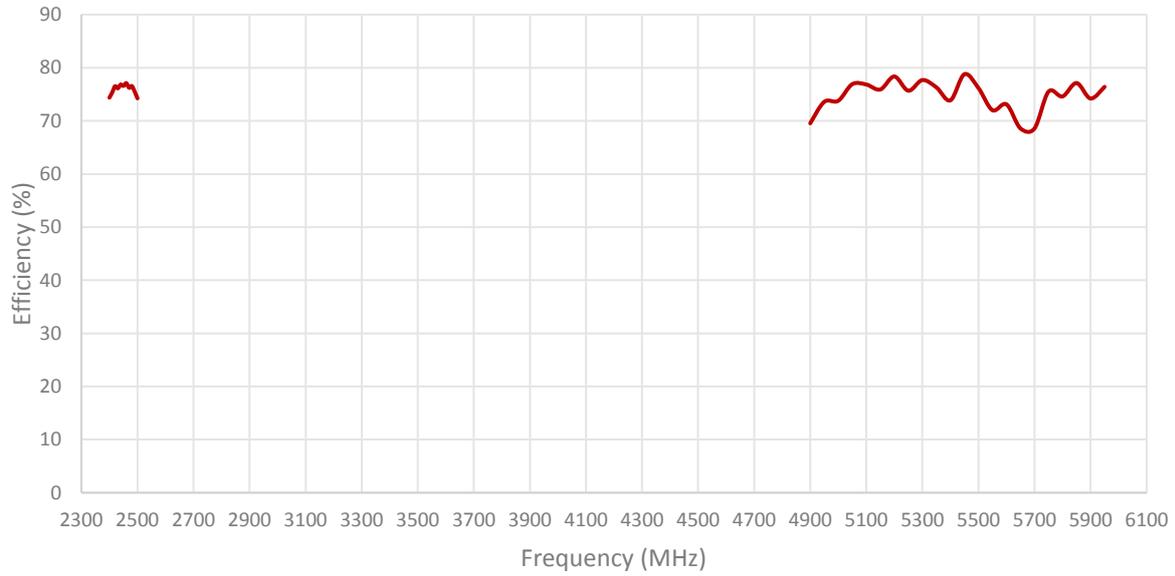

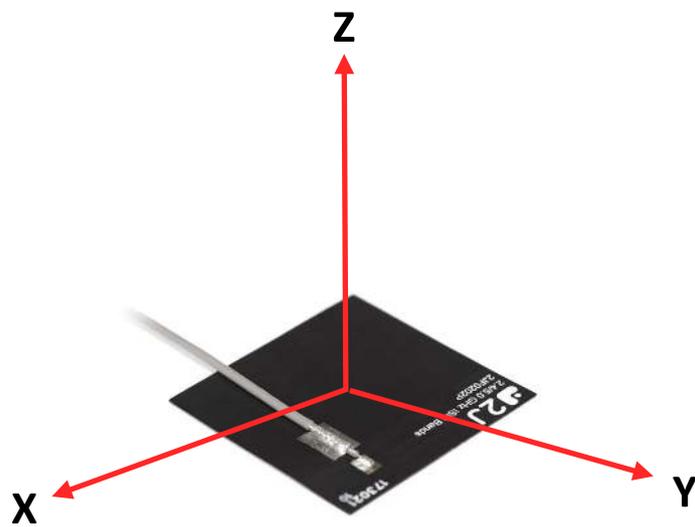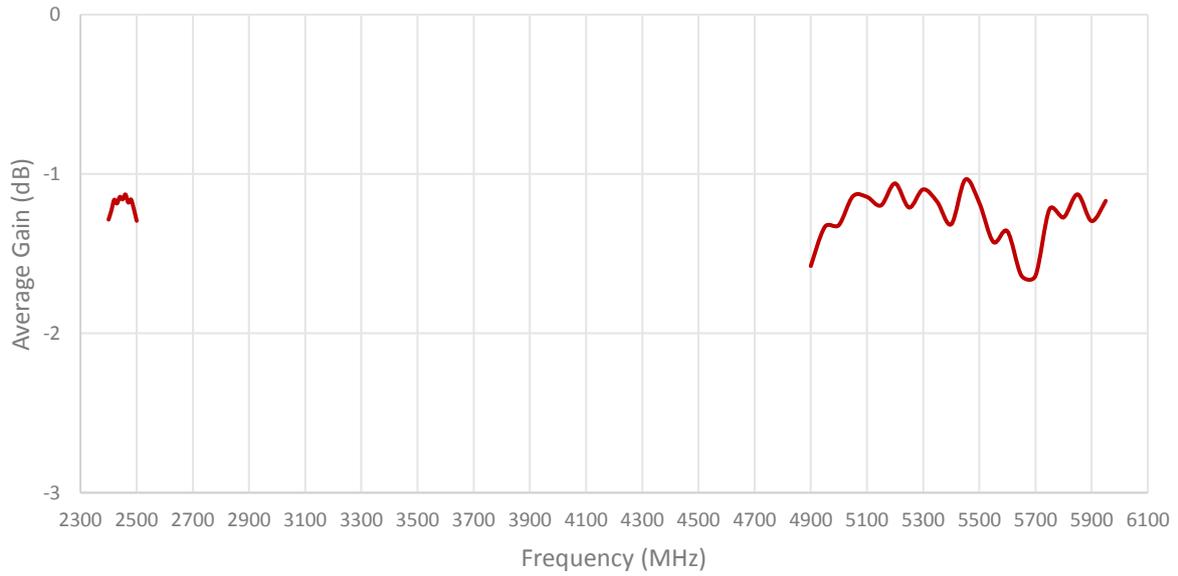


Radiation pattern reference

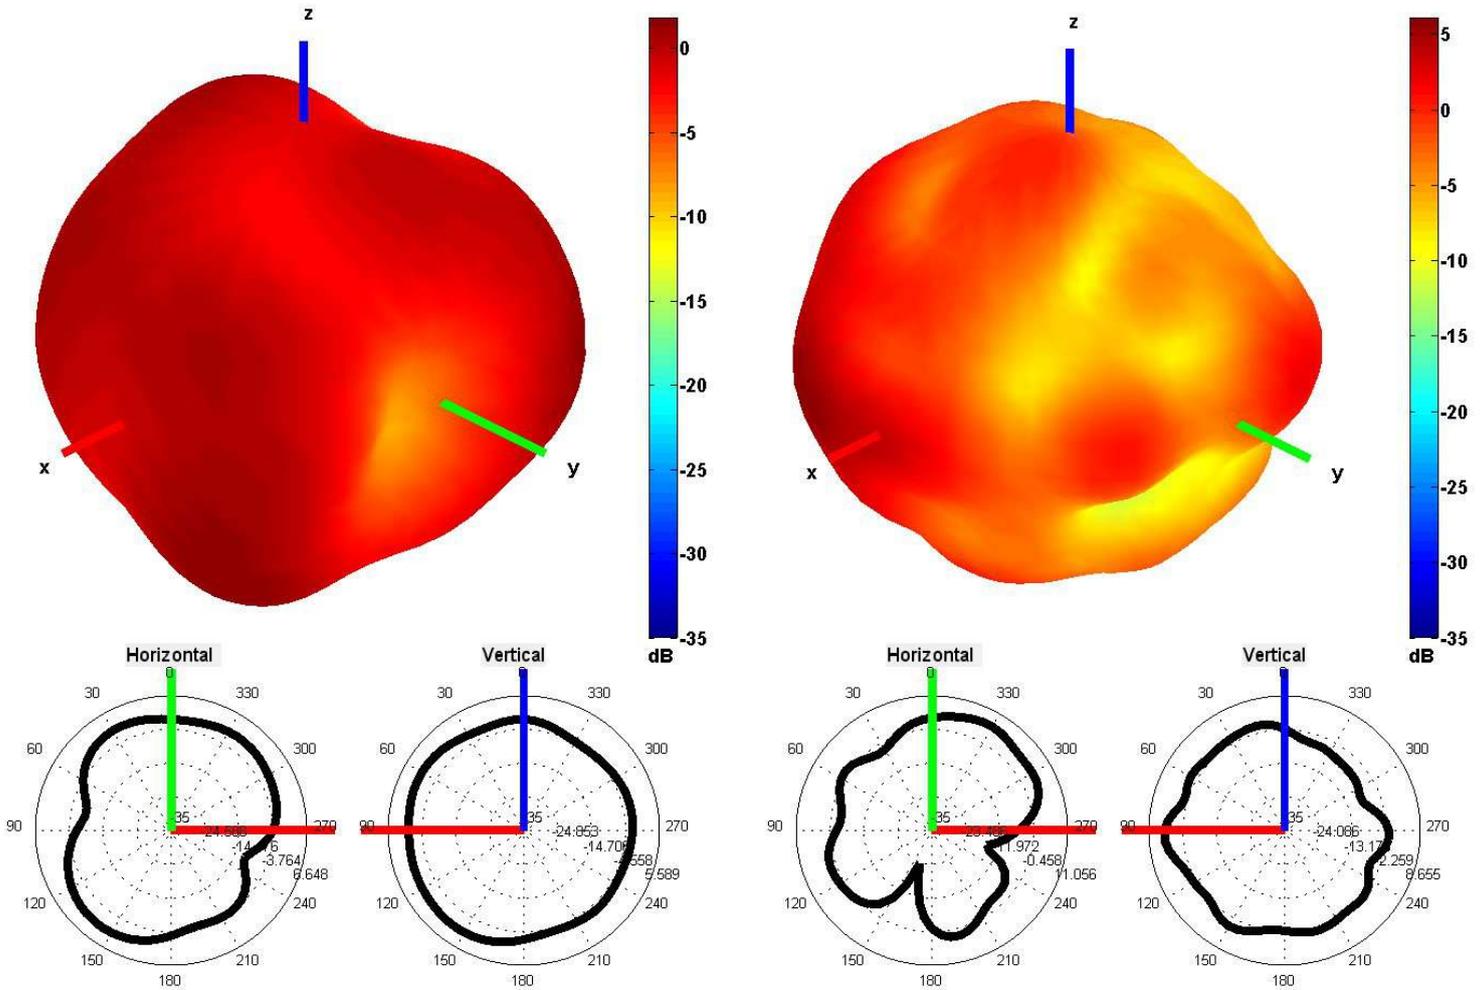

2450 and 5500 MHz Radiation pattern

4. Antenna drawings

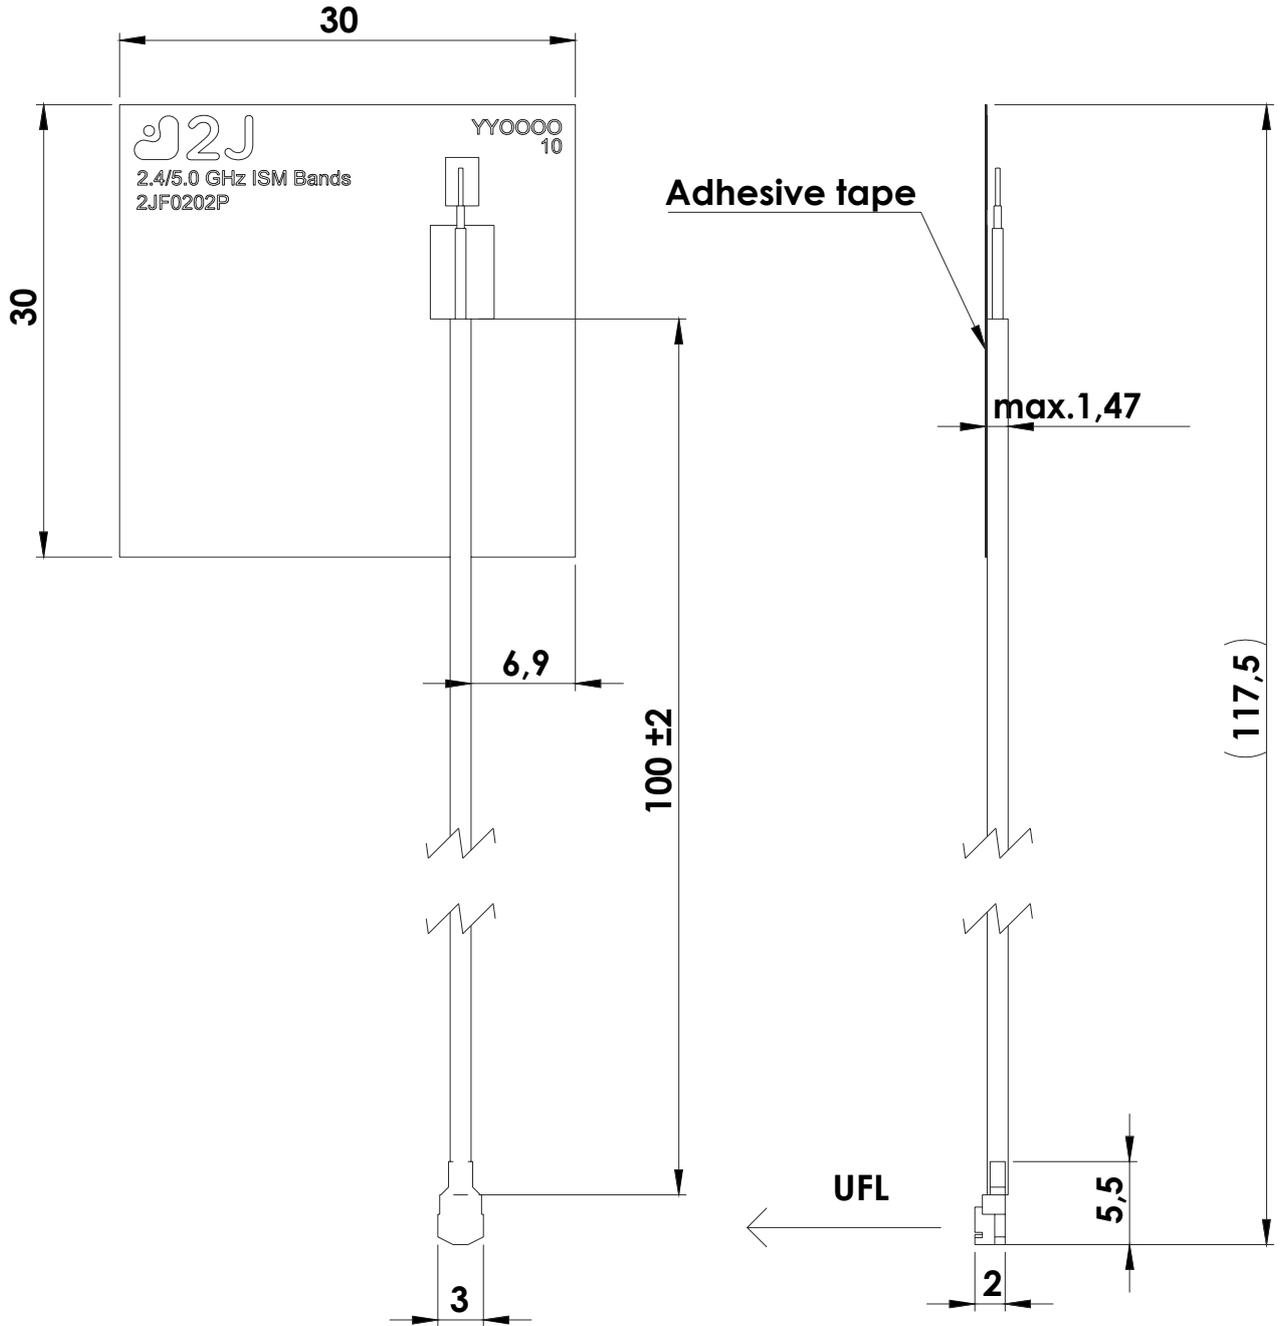

5. Antenna Images

